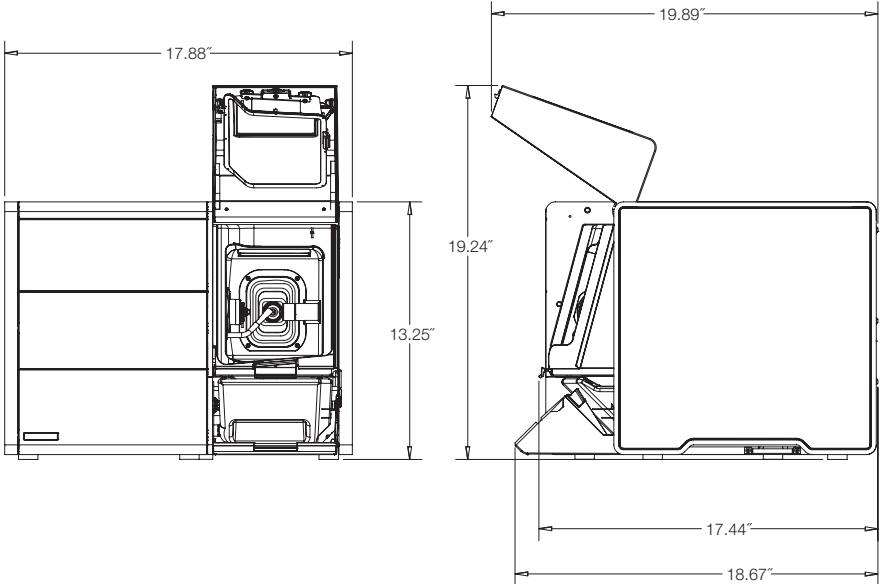


### SPECIFICATIONS

<b>Indications</b>	The fastmill.io In-Office Mill is indicated for use in milling in-office single-unit restorations using a variety of available compatible materials.
<b>Compatible Milling Materials</b>	BruxZir® NOW, BruxZir NOW Bridge Block, BruxZir Esthetic NOW, BruxZir NOW SRC, BioTemps® NOW, Obsidian®, Obsidian NOW, CAMouflage® NOW
<b>Dimensions</b>	<p>18 W x 18 D x 13 H in.</p>  <p>The technical drawings show the following dimensions:</p> <ul style="list-style-type: none"> <li>Front view width: 17.88"</li> <li>Front view height: 13.25"</li> <li>Side view height: 19.24"</li> <li>Top view width: 19.89"</li> <li>Top view depth: 17.44"</li> <li>Bottom view width: 18.67"</li> </ul>
<b>Weight</b>	≤ 115 lbs.
<b>Power Input Voltage</b>	120V
<b>Power Input Frequency</b>	60 Hz
<b>Max Power</b>	350–450 W
<b>Power Input Fuse</b>	6.0 A 250 V
<b>Operating Temperature Range</b>	64.4° F to 122° F (18° C to 50° C)
<b>Storage Temperature Range</b>	64.4° F to 122° F (18° C to 50° C)
<b>Operating and Storage Humidity Range</b>	0% to 85% (non-condensing relative humidity)
<b>Water Ingress</b>	Non-immersion with exception of matching area; damp wipe only on the outside